

*If you are using a printed copy of this procedure, and not the on-screen version, then you **MUST** make sure the dates at the bottom of the printed copy and the on-screen version match. The on-screen version of the Collider-Accelerator Department Procedure is the Official Version. Hard copies of all signed, official, C-A Operating Procedures are available by contacting the ESSHQ Procedures Coordinator, Bldg. 911A*

C-A OPERATIONS PROCEDURES MANUAL

15.3.5.1 Procedure for the Start-up of the Westinghouse MG Set and Excitation of the WH Generator

(Booster/AGS Ring Power Supply Systems Group Procedure EPS-W-001)

Note: This document was formerly a C-A Group Procedure. The content of the group procedure was reviewed by the Technical Supervisor. All approvals and/or issue dates of the original group procedure are maintained for present use.

Hand Processed Changes

<u>HPC No.</u>	<u>Date</u>	<u>Page Nos.</u>	<u>Initials</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

Approved: *Signature on File* _____
 Collider-Accelerator Department Chairman Date

M. Bannon

Booster/AGS Ring Power Supply Systems
Group Procedure EPS-W-001
Original Revision Date: 08/10/2006
Revision G

Procedure for the Start-up of the Westinghouse MG Set and Excitation of the Westinghouse Generator

1.0 Purpose

The purpose of this procedure is to define the steps to be used in the initial start-up of the Westinghouse Motor-Generator (MG) Set.

Also, it defines the responsibilities of the individuals involved.

2.0 Responsibilities

- 2.1 Only individuals involved in the design and construction of the W MG Set shall be involved or trained operators on the Westinghouse M-G Set systems. (See attached list of SPECIALISTS).
- 2.2 The designated RESPONSIBLE operator shall be listed on the BULLETIN BOARD just outside the MG CONTROL ROOM. This name shall be updated on each shift change.
- 2.3 Electrical/mechanical DATA will be taken each shift and recorded on the data sheets inside control room. .

3.0 Prerequisites

- 3.1 All persons involved shall be trained in the manual tripping of the main circuit breaker feeding power to the MG Set (52CB).
- 3.2 All persons involved shall be trained in the operation of the new Control System of the MG Set.
- 3.3 Proper LOTO and testing procedures shall be followed at all times.
- 3.4 Informing of all affected persons and the Maintenance Coordinator shall be conducted prior to commencing of turning on the set.

4.0 Precautions

- 4.1 Proper postings shall be in place.
- 4.2 Hearing protection measures shall be strictly adhered to.
- 4.3 Check with MCR to make sure the power is available prior to starting up.
- 4.4 Check that all cooling systems are operating (includes water and air).

- 4.5 Verify in Bldg. 928 the only feed connected to 52G Siemens is from the Westinghouse. (Westinghouse Bus Links connected []
Siemens Bus Links disconnected []
Transformers cables disconnected [])
- 4.6 In Rk 52 in Bldg. 928 old control room move rotary switch to Westinghouse Run Mode.
- 4.7 Circuit Breaker 57G (Generator Brake) in Bldg 928 must be disabled when running Westinghouse motor Generator Set. (PL8)
- 4.8 Verify no one is in Fan House in the Westinghouse Area.

5.0 Procedure

- 5.1 Electrical/mechanical DATA will be taken each shift and recorded on the data sheets inside control room. This shall be documented in the LOG BOOK (see 6.0).
- 5.2 Make sure that all affected persons are notified.
- 5.3 Turn on all control power, i.e. 110VAC CB'S house power to racks in control room and speed room , 110VAC CB'S UPS PWR to racks in control room and speed room, 120VDC Batteries (charger 5550A is –“on”, 100amp CB inside battery enclosure- closed, and 100 amp CB in Rk 5534- closed), 208VAC 3PH (FDS A11-NE5) for lift pumps is closed , 480VAC 3PH.(FDS DP-A44-1 CKT #4) for hydraulic pump is closed and 3 FDS 'S for fans 1,2,3 in fan house are closed.(refer to block diagram). Also heaters must be turned off in the motor and generator when MG Set will run (FDS-A11-NE6) (CAT 2 – PPE)
- 5.4 Unlock and turn on BRAKE PS FDS-566A.
- 5.5 Make sure 13.8 KV POWER IS AVAILABLE and ON in cubicle #3 next to CB-52 incoming 13.8 KV from 911-13.
- 5.6 Rack in CB52B first, and then CB52. After both circuit breakers are racked in, close the knife switches located on the upper left side of the breaker cubicles. (CAT 4 –PPE)
- 5.7 Check that all W MG Instrumentation is ON and functioning.
 - A. Turn the manual/auto switch of the Fans to manual (Rk 5534). Turn on all three fans-1,2,3. **(0) (Note: for winter running when it is cold outside leave then fans off on startup. After the set has been running for a while monitor the mg set room temperature from Rk 5530 Panel View monitor and turn on the fans as they are needed.)**

Motor Section (1)

- 5.8 TO TURN THE MOTOR ON: At the NEW CONTROL CONSOLE RK 5531 in the NEW WESTINGHOUSE CONTROL ROOM, turn local/remote switch of the **motor controls section** to “local”, then press the STANDBY (STBY) PB at the **motor controls section** of the control panel.(1).
- A. Do a walk through of the MG Set room making sure no unauthorized persons are in the room and it is ready to turn “on” and record the pedestal pressures as per the start-up sheet with lift pumps “on”. Lock door so no unauthorized personnel can enter the room after the walk through is over.
- 5.9 Press (STBY) PB at the **motor controls section** once again to RESET all FAULTS. Note: All motor interlocks must be clear then press (STBY) PB again and reset both PL7 lockout relays together first then press (STBY) PB again and then both PL6 lockout relays together. (1) Note: If PL7 or PL6 lockout relays do not reset check the panel view screen in RK5530 for PL7 and PL6 faults.
- A. Verify the Brake PS is “ON”. (Turn on locally if the remote “ON” did not work.
- B. Verify the 120 VDC is good in Rk 5534.
- 5.10 Check PANEL VIEW screen in Rk 5530 for any PL6 or PL7 FAULTS listed. If there are no faults the motor is ready to be turned on.
- A. Record/Verify the flows and pressures as per the start-up with lift pumps on sheet. Verify there no “Warnings” on the Panel View screen under the 3 pages of warnings. (Note: If warnings exist call a systems specialist to assist.)
- B. Verify Liquid Rheostat is at 100% in RK 5531.
- 5.11 Close 52 CB by pressing the (ON) PB in Rk 5531 **motor controls section**. (1). Record **time the motor was turned “ON”**. (Motor will begin to rotate. After approx. 500 rpm verify the Liquid Rheostat starts to move towards “0” %.) The circulating pump may have some cavitations between 200-400 RPM’s. (Note: motor must come up to speed within 9 minutes or it will trip)
- 5.12 The MG SET is self-protecting, however if you observe any abnormal condition, APPLY the MOTOR BRAKE by pressing the 52B BRAKE (ON) PB or, Alternately press the EMERGENCY CRASH PB ON MAIN CONSOLE.(note: do not apply brake if below 750 RPM) Max. RPM of this motor is 890 RPM’S.
- 5.13 To turn the motor “OFF”: Press the (STBY) PB in RK 5531 **cycloconverter section** first which will unlatch the bridge of the liquid rheostat. Then press the (STBY) PB in Rk 5531 **motor controls section** to bring SET from ON to STBY. Then apply the Brake -CB-52B by pressing the Brake CB-52B Close PB in Rk 5531 and observe that the Brake PS current reads approx. 300 amps. (Note: The Liquid Rheostat should begin to go to 100% and the Lift Pumps should turn “ON” at approx. 800 rpm if they DO NOT press the Emergency Lift Pump “ON’ PB in Rk 5531. It should take approx. 3-4 minutes for the Motor to come to a complete

stop. If the CB_52B does not automatically OPEN after the set reaches “0” RPM’S, OPEN it manually by pressing the CB-52B open PB in Rk 5531.

Hydraulic Section (Motor must be @ 890 RPM’S) (2)

- 5.14 Hydraulics: To operate the Hydraulic portion of the W MG Set, use the **Cycloconverter Section (2)** of the NEW CONTROL CONSOLE Rk 5531(right half). Turn the local/remote switch of the **cycloconverter section (2)** to (local). Set the TV camera so the top of the Liquid Rheostat platform can be seen. Press the (STBY) PB of the **cycloconverter section** until blinking light stops and fault light clears and then press the (ON) PB of the **cycloconverter section**. When the On light blinking stops the hydraulic system pump is ON and observe the Liquid Rheostat PLATFORM will latch. To TURN OFF the hydraulic pump press the (STBY) PB of the cycloconverter section once again.

Exciter Power Supply Section (3)

- 5.15 Rack in CB-52G Westinghouse.
- 5.16 EXCITER: Turn on the FDS switch labeled 911N Ckt 43A for the exciter power supply. To operate the Exciter portion of the W MG Set, use the EXCITER controls **(3)** located in Rk5534 of the WH control room. Make sure the local/remote light is on. Press the (STBY) PB until blinking stops and the FAULT light clears. If the FAULT LIGHT does not clear press (STBY) PB again to reset latched interlocks. Then press (ON) PB and the exciter power supply should turn “ON”. Note that the generator voltage won’t come on until 52G at SIEMENS BLD 928 closes. If the exciter needs to be tested certain PLC interlocks must be bypassed. This can only be done by the qualified PLC/interlocks expert.

To turn the Exciter power supply “OFF” press (STBY) PB once again. **(3)**

Rectifier Section (4)

- 5.17 RECTIFIERS: (Note: The interlock switch located in Rk 52 at Siemens (Bldg 928 old control room) must be in the **Westinghouse Mode** position and the power feed to the 52G breaker at Siemens –Links from the Westinghouse are in and the Siemens links and the transformer cables are disconnected. Check that Rect. modules #2 & #3 have their firing pulses removed and they have been bused out of the circuit (modules #1 & #4 “P” Bank modules and module #5,#6,#7,#8 “F” bank modules are used when running the Westinghouse motor generator or the 2.4 mw transformer.) Verify 52G-Westinghouse is racked in. Load the functions of the cycle to be tested and check all references on the oscilloscope to make sure they were loaded properly in Rk 5533.(Note: Verify the sun station is running the MMPS program in the Westinghouse mode.) To operate the Rectifiers use the RECTIFIERS controls located in rack 5532 of the WH control room. Turn the local/ remote switch to “local”. Press (STBY) PB until blinking light stops and the FAULT light clears. This will CLOSE CB-52G Westinghouse and you should

reset the PL4 lockout relay in RK 5532 now. If the FAULT LIGHT does not clear press (STBY) PB again to reset latched interlocks. Check the signals loaded into the buffers to each pair of rectifier modules by checking the BNC references in Rk 5533. Always check the computer generated power reference in RK 5533 and compare it with the computer generated power reference in the AGSMM program. If there are differences notify the system engineer. If all looks ok press the (ON) PB and the 52G BREAKER at Siemens should CLOSE (this can be monitored on the Panel View screen in Rk 5530). Note that the generator voltage will come on first (in Rk 5534 generator output voltage should go to 7000VAC, if over, press the STBY PB and call system expert. Then the power supply should start following the computer references. If power is swing more than 1 mw check the power reference on the BNC in RK 5533 and compare it with the computer generated reference in the AGSMM program, then call the system engineer.

5.18 To turn the rectifiers “OFF” press (STBY) PB once again.

6.0 Documentation

- 6.1 Operations LOG BOOK shall be started and ALL pertinent entries made.
- 6.2 DATA shall be recorded by the shift operator. The Responsible Group Leader shall initial the log book and make sure that data is recorded daily.

7.0 References

- 7.1 See Testing Procedure and DATA used during the NOV'98 Runs of the W MG Set as it existed prior to the UPGRADE.
- 7.2 Also, reference shall be made to the old W drawings and the new schematics.

8.0 Attachments

- 8.1 List of Specialists
- 8.2 Checklist for Westinghouse Turn “ON”

Attachment 8.1

List of Specialists

- 1) J Sandberg
- 2) I. Marneris
- 3) V. Badea
- 4) R. Bonati
- 5) W. Eng
- 6) P. Rosas
- 7) M.Bannon
- 8) G. Danowski
- 9) S. Savatteri
- 10) J. Funaro
- 11) J. Jimenez

List of Trained Shift Operators

- 1.) J. Famiglietti
- 2.) J. Galarraga
- 3.) J. Mingoia
- 4.) C. Watts

Attachment 8.2

Checklist for Westinghouse Turn “ON”

BY: _____ DATE: _____

1. Three possible power sources to CB 52g siemens are LOTO []
 - A. 2.4 MW Transformer 13.8 KV switch ,verify contact have opened []
 - B. Westinghouse 52G []
 - C. Siemens 52G open and 89 SW’s open KEY from LE1. []
2. Three possible power sources to CB 52g siemens are LOTO. []
3. Westinghouse output links installed above L4-52G Siemens. []
4. 2.4 MW Transformer cables are disconnected in L4 @ Siemens. []
5. Siemens generator output links removed (cage area above front of 52G Siemens). []
6. Rotary switch in **Westinghouse Position.** (RK 52 in Siemens old Control Room.) []
7. Relays in LA73 d7201 & d7202 are removed from there sockets. []
8. Ensure CB 57G cannot close by disabling its close command. []
9. Unplug the firing plugs in Siemens Rect. Modules #2 & #3. []
10. Change the current loop gain pot in Module. 5 from setting of 9 to setting of 7. []
11. In Rect. Modules MD #1 & #3 --- the following resistor on the voltage regulator board. In MD #1 (R28), in MD #3 (R29) must be taken out of circuit using the headers on the board to take resistors in and out of circuit. []
12. Remove the reference transformer fuses in MD #2 & #3 and place them in the front binder holder. []
13. Check the Siemens to Westinghouse buffer chassis in RK 5086A in the new Siemens Control Room is “O”. []
14. Set the 81P relays in RK LA73 to 70 % tap, all four 81 P relays (over-voltage relays) []
15. All Kirklock Keys in key tree in LE1 at Siemens for run mode. []
16. All Kirklock keys in key tree at Westinghouse for run mode. []
17. Signs installed on 52G Siemens stating we are running from Westinghouse. []
18. DC output bus configure for Westinghouse Run (only 1 “P” bank PS in parallel with two “F” banks. MD #2 & #3 are not used and are bused out. []
19. FDS 208 VAC 3 PH for lift pumps is “CLOSED” “ON” (A11-NE5) []
20. FDS 208 VAC 3PH for heaters is “OPEN” “OFF” (A11-NE6) []

21. FDS 480 VAC 3PH for hydraulics is “CLOSED” “ON” (DP-A44-1-FS-#4) []
22. FDS 480 VAC 3PH for 3 intake air fans is “CLOSED” “ON” []
23. 120 VAC UPS PWR CB’S are “ON” UPS 3PP1 CB’S 1-10,12,14,16,18. []
24. 120 VAC House PWR CB’S are “ON” DP-A44-1-7-A-1 CB’S 1-11,13,15,17,19. []
25. 120 VDC Control PWR “ON” (100A CB inside battery bank)(100A CB IN RK5534 Control Room) []
26. The following CB’S are racked into the run position at west- []
 - A. CB-52 []
 - B. CB-52B []
 - C. CB-52G (W) []
27. FDS 480VAC 3PH for bake power supply locked and “CLOSED” “ON” []
28. FDS 480 VAC 3PH for exciter power supply unlocked and “CLOSED” “ON” []
29. Circuit breaker outside for exciter power supply is “CLOSED” “ON” []
30. Knife switch inside CB-52 cubicle is “CLOSED”. []
31. Knife switch insideCB-52B cubicle is “CLOSED”. []
32. Visual inspection of motor-generator area completed. []
33. Visual inspection of Westinghouse area completed. []
34. Visual inspection under Westinghouse MG Set Motor-Generator Pits. []
35. Oil pit are checked []
36. Affected personnel in Bldg. 928 have been notified of testing []
37. MCR notified of Westinghouse MG Set will be turned on. []
38. Follow Start-up procedure for Westinghouse. []


Attachment 8.3

Checklist for Siemens Operation after Running Westinghouse

BY: _____

DATE: _____

1. Three possible power sources to CB 52G Siemens are LOTO.
 - A. Westinghouse 52G []
 - B. 2.4 MW Transformer 13.8 KV Switch, verify contact have opened. []
 - C. C. Siemens 52G open and 89 SW'S open and key from LE1 []
1. Westinghouse output links removed above L4-52G Siemens. []
2. 2.4 MW transformer cables are disconnected in L4 @ Siemens []
3. Siemens generator output links connected (cage area above-front of 52G Siemens) []
4. Rotary switch in **Siemens Position**. (RK 52 in Siemens old Control Room.) []
5. Circuit breaker 57G (generator brake) in L4 re-enabled (PL8) []
6. Relays in LA73 d7201 & d7202 are reinstalled in there sockets []
7. Plug the firing plugs in Siemens rect. modules 2 & 3. []
8. In rectangular modules MD #1 & #3 -- the following resistors on the voltage regulator board. In MD #1 (R28), in MD #3 (R29). (BOTH 13K .1%) have to be put back into the circuit using the header jumper. []
9. Reinstall the reference transformer fuses in MD #2 & #3. []
10. Move "I" loop pot in MD #5 from 7 to 9 setting on dial pot. []
11. Set the 81P relays in Rk LA73 to 55 % tap, all 4four 81 P relays (over-voltage relays) []
12. All Kirklock Keys in key tree in le1 at siemens for run mode []
13. Signs installed on 52G Siemens stating we are running from Siemens MG Set []
14. Configure the DC output bus - for Siemens running (all power supplies used--- two "p" banks in parallel with two "F" bank Rect. Modules--- in each station.) []

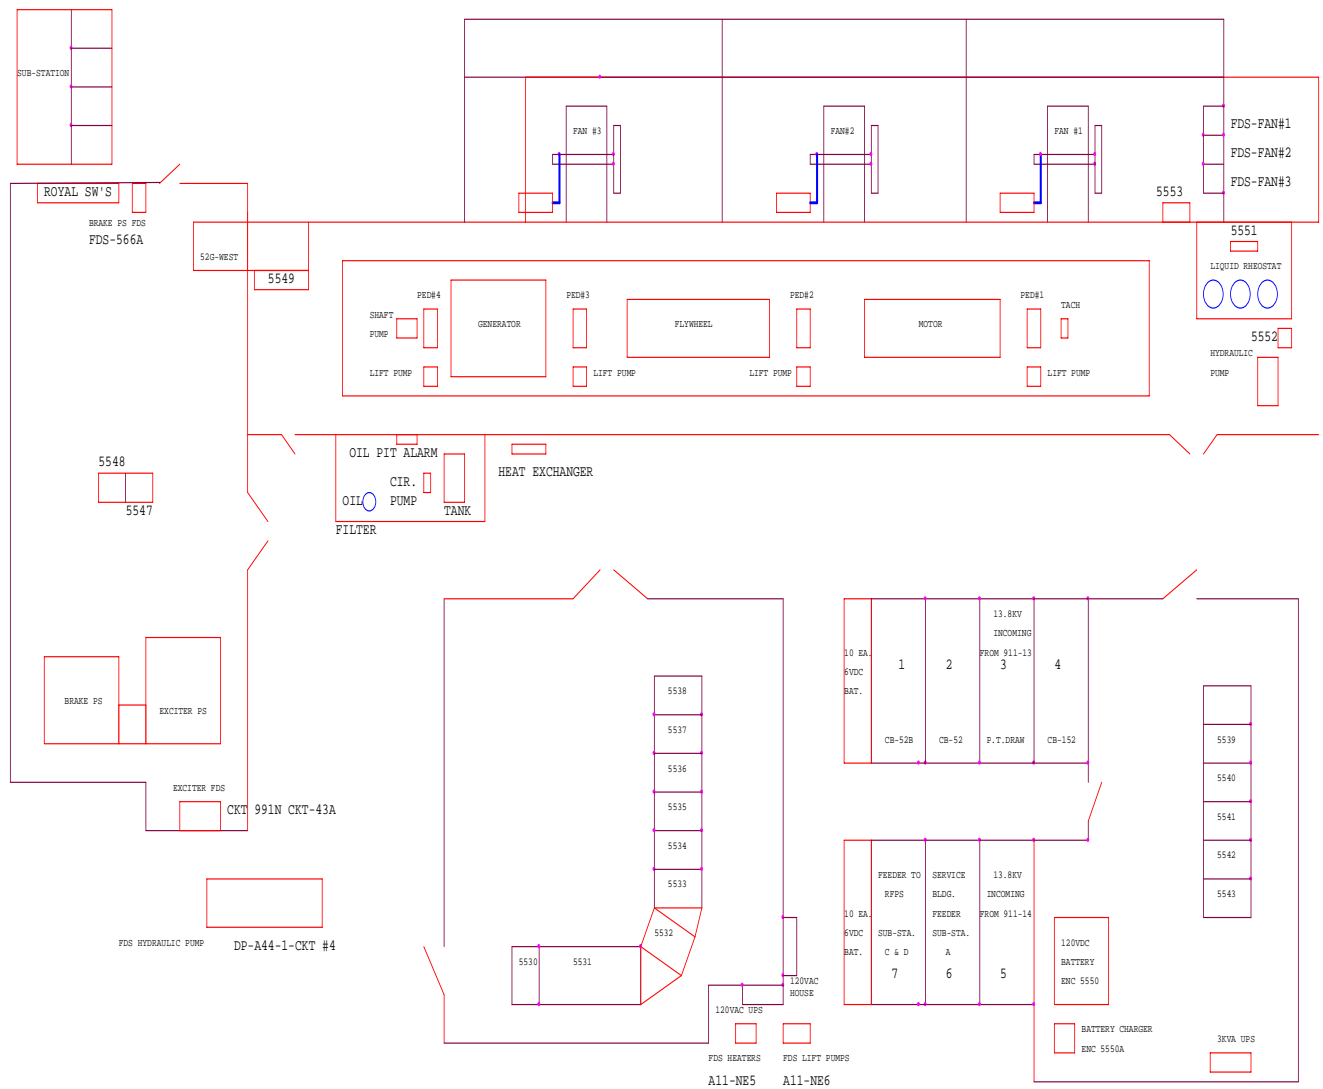

File		
BLOCK DIAGRAM OF WEST MG SET		
Doc	Document Number	Rev
C	H. BARNON	
Date	Friday, January 12, 2001	Sheet 1 of 1